






It is designed to improve the appearance of your interior and to provide a touch of style. These type of blinds integrate well with both, modern interiors as well as classical designs, because of the way they harmoniously combine practical attributes with distinctive allure.



SOD-2407 SOD-2405






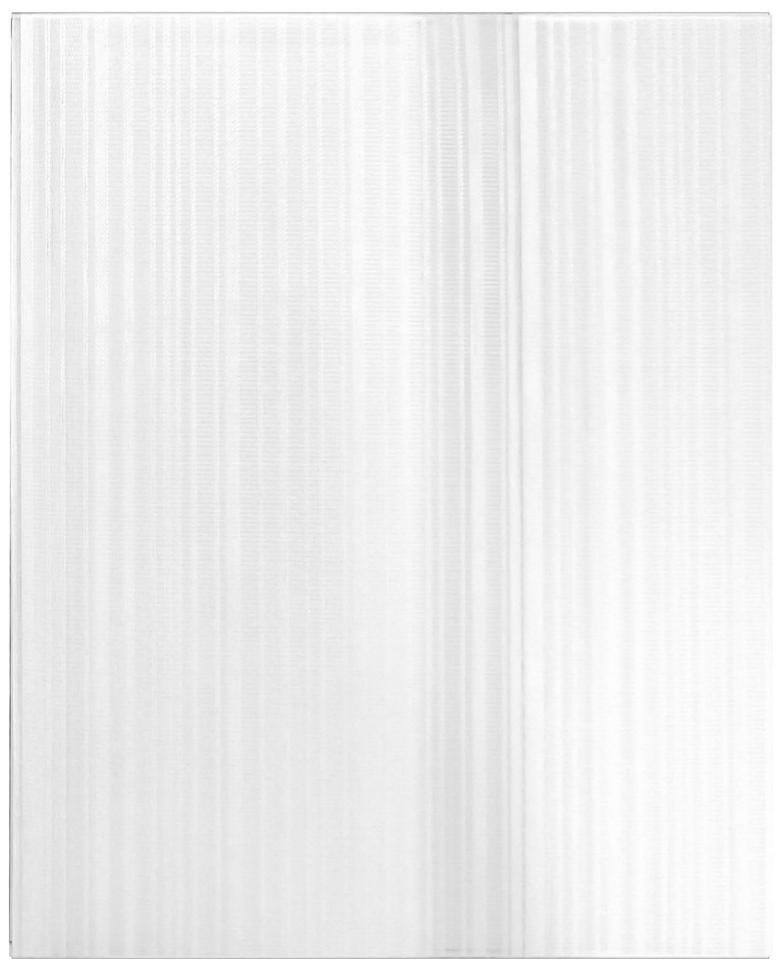



Closed View

Sierra Blinds offers a combination of Sheer and solid fabric with tilting option and when vanes closed, they provide you privacy.

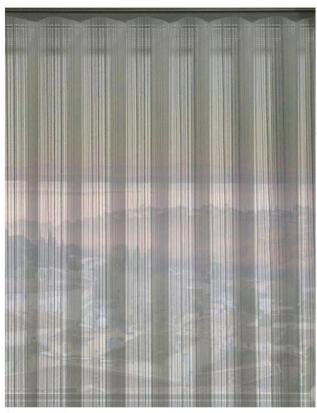

Open View

With the vanes open, they offer a magnificent see through view and with tilting option you can control the amount of light entering your room.





Orianna Dimout	Technical Details
Composition	100% Polyester
Visibility	Dimout
Weight Approx.	204g/m² (± 5%)
Thickness	Solid Fabric: 0.47mm Sheer Fabric: 0.14mm (±0.05)
Width	4.50 mtr (With Motorization 4.00 mtr)
Drop	2.80 mtr
UV Blockage	99.90%
Hanging Properties	Excellent
Tearing Strength	Very High
Cleaning	Conditionally cleanable with a damp cloth
Operating System	Manual Cord & Ball chain, Wand Control
Motorization	Yes
Lead Free	Yes
Light Fastness	Grade 4
Woven/Non-Woven	Woven
Coated/Uncoated	Uncoated







Wand Control



Motorization in Blinds

Operating Systems















Motorization in blinds for your **comfort and easiness.**




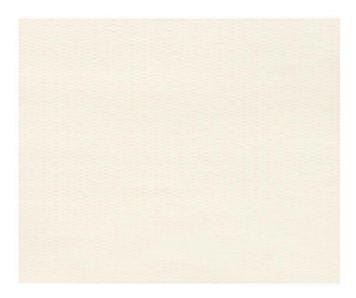

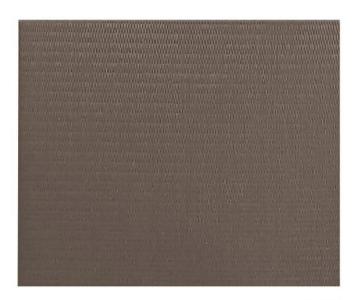





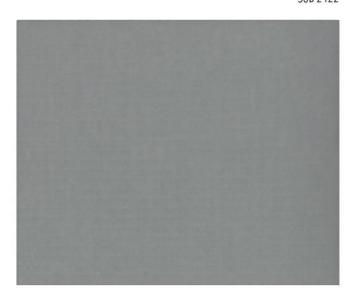



SOD-2424 SOD-2425







Closed View

Sierra Blinds offers a combination of Sheer and solid fabric with tilting option and when vanes closed, they provide you privacy.



Open View

With the vanes open, they offer a magnificent see through view and with tilting option you can control the amount of light entering your room.



Orianna Dimout	Technical Details
Composition	100% Polyester
Visibility	Dimout
Weight Approx.	225g/m² (± 5%)
Thickness	Solid Fabric: 0.35mm Sheer Fabric: 0.14mm (±0.05)
Width	4.50 mtr (With Motorization 4.00 mtr)
Drop	2.80 mtr
UV Blockage	96%
Hanging Properties	Excellent
Tearing Strength	Very High
Cleaning	Conditionally cleanable with a damp cloth
Operating System	Manual Cord & Ball chain, Wand Control
Motorization	Yes
Light Fastness	Grade 4
Woven/Non-Woven	Woven
Coated/Uncoated	Uncoated







Tilting Fabric Vanes

Wand Control

Motorization in Blinds

Operating Systems















Motorization in Blinds



SOD-2442






SOD-2443 SOD-2444







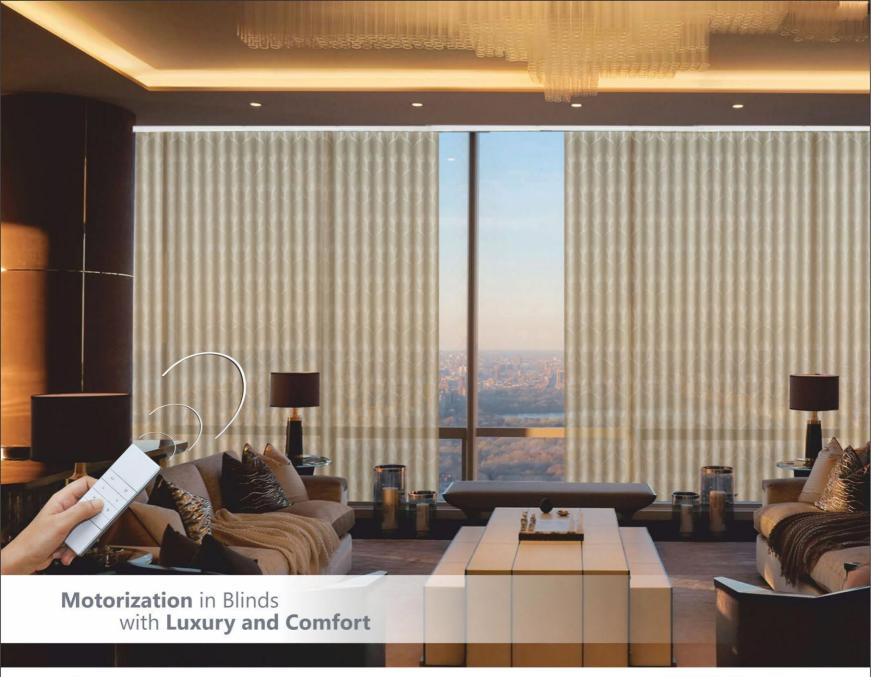











Tilting Fabric Vanes

Wand Control

Motorization in Blinds

Otto Dimout	Technical Details	
Composition	100% Polyester	
Visibility	Dimout	
Weight Approx.	235g/m² (± 5%)	
Thickness	Solid Fabric : 0.35mm Sheer Fabric : 0.14mm (±0.05)	
Width	4.50 mtr (With Motorization 4.00 mtr)	
Drop	2.80 mtr	
UV Blockage	96%	
Hanging Properties	Excellent	
Tearing Strength	Very High	
Cleaning	Conditionally cleanable with a damp cloth	
Operating System	Manual Cord & Ball chain, Wand Control	
Motorization	Yes	
Light Fastness	Grade 4	
Woven/Non-Woven	Woven	
Coated/Uncoated	Uncoated	

Operating Systems











7 BESPOKE BLINDS

The 7 Bespoke Collection is curated keeping 'Convenience' in mind. The Shade Selector is sturdy, compact and easy to carry. Shades of each product are placed in an organised way to facilitate its demonstration to user.